



Pin Brazing Products

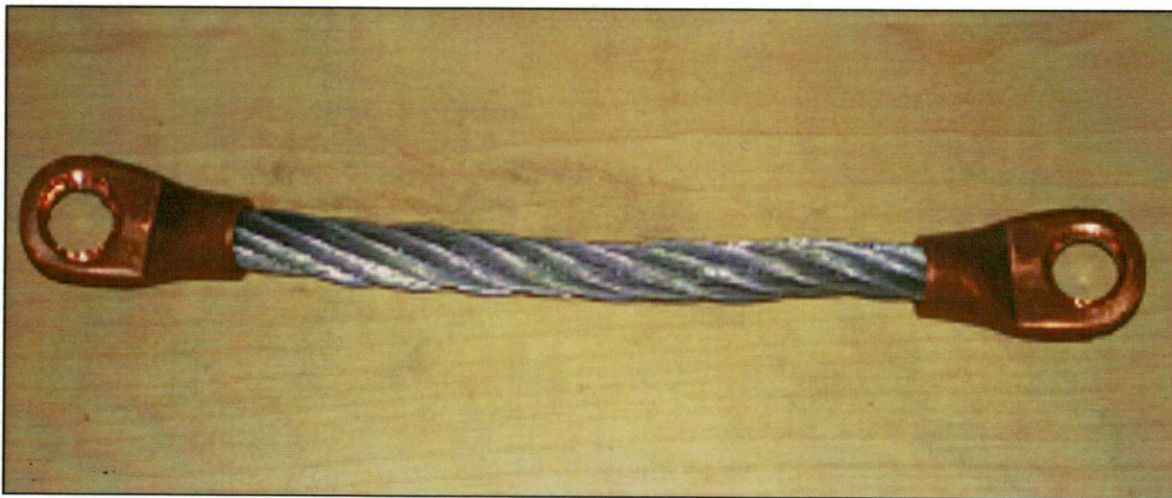


ATOOT Pin Brazing products are used to provide very low resistance, non-corrosive, permanent, safe & reliable electrical connections for various type of applications in Railways and Cathodic Protection installations. Use of High Quality Cadmium Free Silver brazing alloys & Special Fluxes ensures safety of man and material.

A. Brazing Pin Specification:

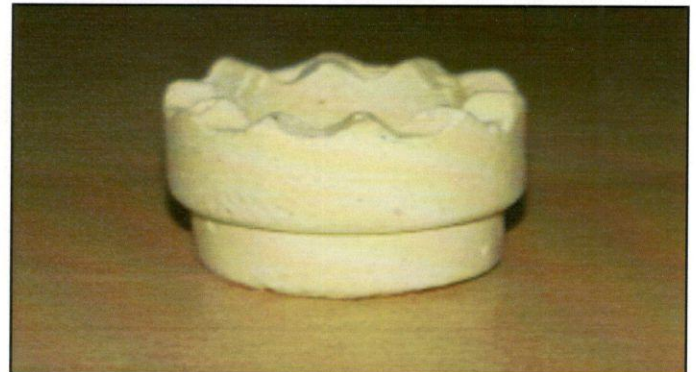

Type	Size	Material	Remarks
ATOOT 1001	8mm	Silver Alloy; Brass	Direct Type.
ATOOT 1002	M8	Silver Alloy; Brass	Threaded Type.

B. Ceramic Ring Specification:

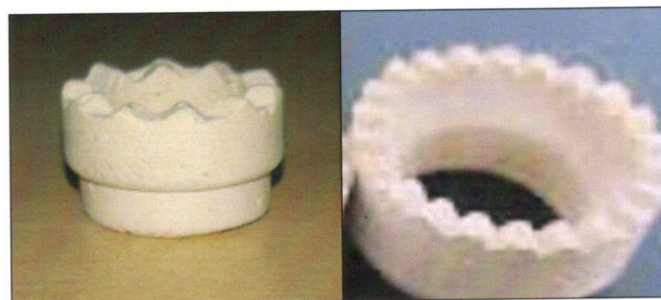

Type	Size	Material	Remarks
ATOOT 2001	8mm	Ceramic	Used with ATOOT 1001
ATOOT 2002	12mm	Ceramic	Used with ATOOT 1002

C. Bonds Specification:



Type	Size	Material	Remarks
ATOOT 3001	L= 150mm; 20 sq.mm	Hot Dipped Galvanized Steel; Copper	Without PVC
ATOOT 3002	L= 1000mm; 20 sq.mm	Hot Dipped Galvanized Steel; Copper	With PVC
ATOOT 3003	L= 2000mm; 20 sq.mm	Hot Dipped Galvanized Steel; Copper	With PVC
ATOOT 3004	L= 2500mm; 20 sq.mm	Hot Dipped Galvanized Steel; Copper	With PVC
ATOOT 3005	L= 4000mm; 20 sq.mm	Hot Dipped Galvanized Steel; Copper	With PVC
ATOOT 3006	L= 5000mm; 20 sq.mm	Hot Dipped Galvanized Steel; Copper	With PVC





NOTE: Cable of other material and sizes is also available on request.

D. Special Copper Lugs for Pin Brazing:



Type	Size	Material	Remarks
ATOOT 4001	16 mm sq.	Copper	Without Tin Plating
ATOOT 4002	20 mm sq.	Copper	Without Tin Plating
ATOOT 4003	35 mm sq.	Copper	Without Tin Plating
ATOOT 4004	35 mm sq.	Copper	With Tin Plating

E. Packaging:

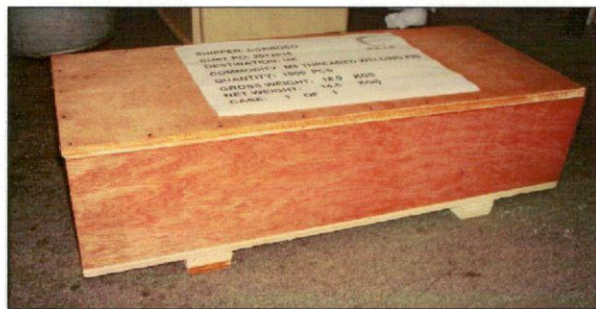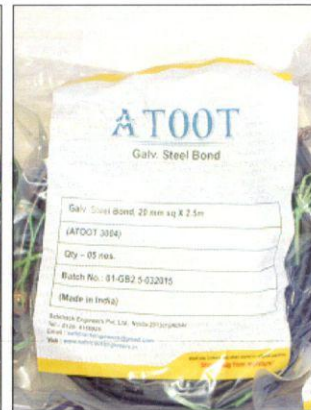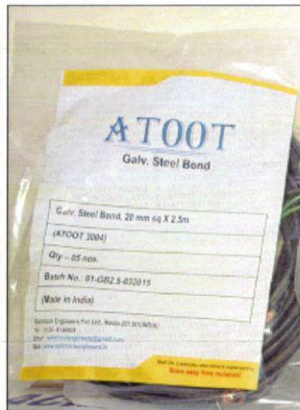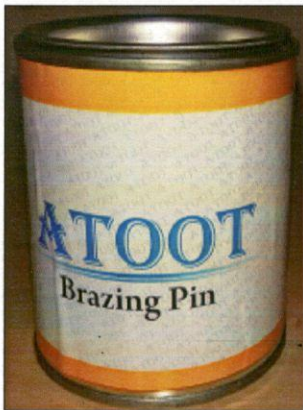

SAFETRACK ENGINEERS PVT. LTD.

A-11, 1st Floor , Sector - 9, Noida-201301 (U.P.) | Mobile: +91-9971458222 | Telefax: +91-120-4156928

Email: safetrackengineers@gmail.com | Web: www.safetrackengineers.in

Deals in : Pin Brazing, Lightning & Surge Protection, Maintenance Free Earth etc.